

ପୌରପରିଷଦ କାର୍ଯ୍ୟାଳୟ, ପାରଳାଖେମୁଣ୍ଡି, ଗଜପତି

OFFICE OF THE MUNICIPAL COUNCIL PARALAKHEMUNDI, GAJAPATI

Ph No: 06815-222052, e-Mail: parala.mply@gmail.com

Letter No. 2254

Dated: 08.07.25

QUOTATION CALL NOTICE

Sealed quotations are invited from the intending Registered Firms / Agencies for supply & fixing of RCC precast concrete chair / chair (As per the specification & Photo given) at different location/ public places of Paralakhemundi Municipality area.

Schedule Paper Cost (non refundable)	Rs.4,000/- (in shape of Demand Draft in favour of Executive Officer, Paralakhemundi Municipality)
Sale of Schedule Paper (Start Date)	09.07.2025, 10.00 AM
Sale of Schedule Paper (End Date)	17.07.2025, up to 05.00 PM
Last date of Receipt of Schedule Paper	18.07.2025 up to 05.00 PM
Opening of Bid	19.07.2025, 11.00 AM at Paralakhemundi Municipality

The detail of Quotation Call Notice document will be available in the District website of Gajapati i.e., <https://gajapati.odisha.gov.in> & Office website i.e., <https://www.paralakhemundimunicipality.com> from 09.07.2025 to 17.07.2025.

Technical Bid (Part-I) (in the Prescribed Format)	Financial Bid (Part-II) (in the Prescribed Format)
1. GST 2. PAN 3. Previous experience if any	1. Price of each Cement Chair (including GST, Transportation to sites and Installation)

- The sealed quotation must reach to this office by Speed Post/ Registered Post only.
- Quotationers who are technically qualified are considered for opening of their Financial bid.
- The authority reserve the right to reject any or all the quotation call notice without assigning any reason thereof.

Executive Officer

Paralakhemundi Municipality

Memo No. 2255

Date. 08.07.25

Copy submitted to the Director, I & PR Department, Odisha, Bhubaneswar for Advertisement in One Local Odia Daily News Paper with a request to publish the above Quotation notice.

Executive Officer

Paralakhemundi Municipality

P.T.O.

Memo No. 2256

Date. 08.07.25

Copy to the District e-Governance Manager, Collectorate, Gajapati for information and requested to upload the tender call notice and detail tender documents in the district portal for information of the public/prospective bidders from 10.00 A.M. of 09.07.2025 to 5.00 P.M. of 17.07.2025.

[Signature]
08/07/2025
Executive Officer
Paralakhemundi Municipality

Memo No. 2257

Date. 08.07.25

Copy submitted to the Collector & District Magistrate, Gajapati / The Project Director, DUDA, Gajapati for favour of kind information.

[Signature]
08/07/2025
Executive Officer
Paralakhemundi Municipality

Memo No. 2258

Date. 08.07.25

Copy submitted to the Tender Committee Members of Paralakhemundi Municipality for kind information and requested to make convenient to attend the tender opening on above scheduled time.

[Signature]
08/07/2025
Executive Officer
Paralakhemundi Municipality

SPECIFICATION FOR CEMENT CHAIR

1. Product Description:

- **Type:** RCC Precast Colored Chair
- **Material :** Reinforced Concrete(RCC)
- **Thickness:**100mm
- **BackHeight:**1000mm
- **FrontHeight:**400mm
- **BaseWidth:**620mm

2.General Requirement : The precast concrete reinforced chairs shall be manufactured in./ accordance with the design requirements and details shown in the plan, and in conformity with the requirements of this specification and item no. 172020 of USSOR.

3.Materials and Construction Methods : The material and construction of precast concrete reinforced chairs will be as follows:


- **Concrete Mix Design :** The chairs shall be cast using M-30 Grade concrete mix in
Accordance with IS:10269:2009 (with latest amendment) in gray cement by using vibro - compaction _ technique and with reinforcement as detailed in this specification. The manufacturer shall be responsible to design a mix which achieves both the strength and the surface finish required for the installation and application. Compressive strength shall be not less than 30 MPa at 28 days
- **Reinforcement Steel :** TMT reinforcement bars conforming to IS:1786:2008 of dia 10 mm shall be used as main reinforcement bar and 4mm dia mild steel bars shall be used as
Stirrups as per reinforcement diagram.
- **Connections :** 12mm dia x 65mm long galvanized steel CSK (Countersunk) bolts with EVA (Ethylene Vinyl Acetate) washer for connecting seating plank with leg and half threaded carriage bolts & nuts with EVA & steel washers of size 165mm length x 8mm dia for connecting back rest plank with leg.
Threaded steel fastener shall confirm to IS:1367 with latest amendments.
- **Paint :** Red color acrylic-based paint (Other color may be used, if decided by Engineer-in- charge) confirming to IS:15489 should be used.


4. Details of member of precast concrete reinforced chair:

- **RCC Base Supports :** Two number of legs manufactured using M-30 grade grey cement concrete of back height 1000mm, front height 400mm, bottom width 620mm with 100mm thickness. Each leg shall be reinforced with 4 nos. of 10mm dia TMT bars distributed uniformly along the section and periphery of the legs and tied with 4mm dia mild steel stirrups as per detailed given in drawing. Each leg will have 3 nos. 12mm dia 65mm length galvanized coupling nuts, welded suitably to the main reinforcement at appropriate locations on the seating to receive concrete planks on the legs and 3 holes to receive carriage bolts for fixing back rest planks.

- **Planks:** Five RCC planks of size 1500mm x 100mm x 50mm shall be cast using M-30 Grade grey cement mixed with 3% red pigment (Other color may be used, if decided by Engineer) and each plank reinforced with 2 nos. 10mm dia TMT bars along the length and 10nos. 4mm dia mild steel bars along the width and having 2 holes of 14mm dia at appropriate location to receive 12mm dia galvanized bolts for fixing these planks on the legs. One RCC plank of size 1500mm x 200mm x 50mm shall be cast using M-30 grade grey cement concrete mix with 3% red pigment (Other color may be used, if decided by Engineer) and shall be reinforced with 3 nos. 10mm dia TMT bars along the length as per drawing and 10nos. 4mm dia mild steel bars along the width and having two holes of 14mm dia at appropriate location so as to receive 12 mm dia galvanized bolts for fixing on the legs
- 5. **Finish:** Finish of concrete chair shall be generally equal to the approved sample. Exposed surface should exhibit a typically uniformly smooth texture with no bugholes and smooth Mold seams.
- 6. **Tolerances :** All dimensions should be as per drawing ± 3 mm.
- 7. **Product Delivery, Handling and Storage**
 - Deliver materials to site, ready for use in the accepted manufacturer's original and unopened containers and packaging, bearing labels as type of material, brand name/manufacturer's name.
 - Store materials under cover in a dry and clean location, off the ground. Remove delivered materials which are damaged or otherwise not suitable for installation from job site, and replace with acceptable materials as directed by the engineer.
- 8. **Installation of RCC Chair:** Each seating plank(bottom) of chair will be bolted with the leg with the help of 12 dia x 65mm length galvanized steel CSK (Countersunk) bolts with EVA (Ethylene Vinyl Acetate) washer. Back rest planks will be fitted with half threaded carriage bolts and nuts with EVA and steel washers of size 165mm length x 8mm dia. After assembly of legs and planks at site, the hole visible at the back side of the chair will be sealed with cement mortar to prevent pilferage and plank will be painted with red color acrylic based paint (Other color may be used, if decided by tendering authority). Head of bolts shall be grouted with epoxy resins like Araldite.
- 9. **Measurement :** The unit of measurement shall be as complete chair.
- 10. The price shall cover the manufacturing, handling and installation including labour, material and equipments.

NOTE:-Specifications as per drawing (See below page)


Executive Officer
Paralakhemundi Municipality

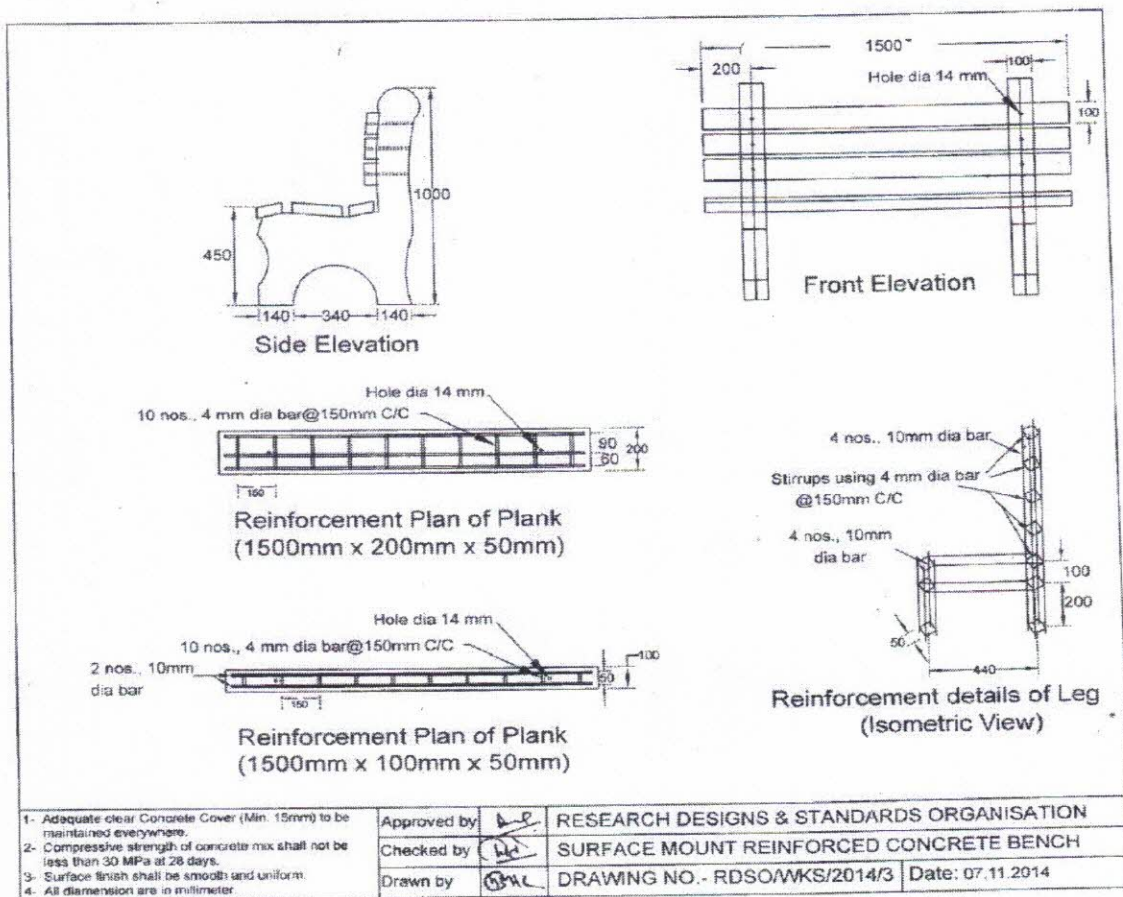

[Signature]
3.7.25
Junior Engineer
Paralakhemundi Municipality

[Signature]
03/07/25
Municipal Engineer
Paralakhemundi Municipality

[Signature]
03/07/25
Executive Officer
Paralakhemundi Municipality

[Signature]
03/07/25
Chairperson
Paralakhemundi Municipality

ପୌରପରିଷଦ କାର୍ଯ୍ୟାଳୟ, ପାରଳାଖେମୁଣ୍ଡି, ଗଜପତି

OFFICE OF THE MUNICIPAL COUNCIL PARALAKHEMUNDI, GAJAPATI

Ph No: 06815-222052, e-Mail: parala.mply@gmail.com

QUOTATION SCHEDULE

(COVER-1)

(TECHNICAL BID)

"Part-I-TECHNICAL Bid"

1. Technical Bid Details

Name of the Firm :

2. Schedule Cost DD

Required to be submitted for
an amount of Rs. 4,000/- :

3. Service Tax / GST Registration Details :

4. Experience Certificate, if any :

Suburao
02/04/2024

ପୌରପରିଷଦ କାର୍ଯ୍ୟାଳୟ, ପାରଳାଖେମୁଣ୍ଡି, ଗଜପତି

OFFICE OF THE MUNICIPAL COUNCIL PARALAKHEMUNDI, GAJAPATI

Ph No: 06815-222052, e-Mail: parala.mply@gmail.com

QUOTATION SCHEDULE

(COVER-2)

(FINANCIAL BID)

"Part-II-Price Bid"

Name of the Work : Installation of Cement Chair at Different Location of Paralakhemundi Municipality area.

Name of the Firm /Tenderer :

Address :

SL No	Specification	Cost of Cement Chair per Each (including GST, Installation & Transportation to sites)
1	Supplying, fitting & fixing of cement chair with painting & logo as per given specification.	

Authorized signatory along with the seal

[Signature]
09/07/2024